

PTAC

PACKAGED TERMINAL AIR CONDITIONER

SUBMITTAL DATA SHEET	CH-PTHE15HP
Job Name:	Date:
Lacation:	Approval:
Engineer:	Construction:
Submitted to:	Unit #:
Submitted by:	Drawing #:
Reference:	

.OM.



This warranty should be registered on our web-site www.cooperandhunter.us within 60 days of installation. The warranty is only valid when installed by a Licensed HVAC Technician. A warranty period of Seven (7) years on compressor to the original registered end-user. A warranty period of Five (5) years on all parts to the original registered end user. Warranty applies only to products remaining in their original installation location.

GENERAL FEATURES

- Auto Restart
- Fresh Air Ventilation
- Digital Temperature Control
- Auto Defrost

- LED Display
- Anti-corrosion Proof Coils
- Gold Fin

UNIT SPECIFICATION

Indoor side air flow (Hi/Mi/Lo)	373.53/344.71/311.76 CFM
Indoor side noise level (Hi/Mi/Lo)	53/52.5/52 dB(A)
Dimension (WxDxH)	42.01x20.94x15.98 in
Net/Gross weight	116.84/126.54 lb
Design pressure	300/540 psi
Refrigerant type/Quantity	R410A/37,04 oz
Application area	215.28-312.15 sp.ft

PERFORMANCE AND EFFICIENCY

Cooling	Capacity	14,700/14,500 Btu/h
	EER	3.11
	Input	1390/1370 W
Heating (PTC)	Capacity	10,900/8,900 Btu/h
	Input(Heater)	3535/2900 W
Heating (Heat pump)	Capacity	13,500/13,200 Btu/h
	Input	930/905 W
	СОР	3.20

OPERATION TEMPERATURE RANGE

Indoor		Outdoor	
cooling	heating	cooling	heating
63~90°F	32~81°F	64~109°F	23~75°F


ELECTRICAL

Power supply	208-230V/60Hz, 1Ph		
Starting current	47.1 A		
Indoor side fan motor			
Input	37 W		
Outdoor side fan motor			
Input	87 W		



SUBMITTAL DATA SHEET CH-PTHE15HP

Dimension of air conditioner

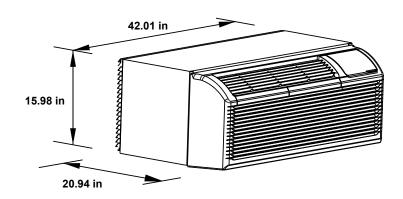

Dimension of sleeve assembly (optional)

