

**Job Name:** \_\_\_\_\_  
**Location:** \_\_\_\_\_  
**Engineer:** \_\_\_\_\_  
**Submitted to:** \_\_\_\_\_  
**Submitted by:** \_\_\_\_\_  
**Reference:** \_\_\_\_\_

**Date:** \_\_\_\_\_  
**Approval:** \_\_\_\_\_  
**Construction:** \_\_\_\_\_  
**Unit #:** \_\_\_\_\_  
**Drawing #:** \_\_\_\_\_



### KEY FEATURES:

- LED display
- Smart Kit Ready
- Quiet operation
- Multiple fan speeds (LOW/MED/HI/TURBO)
- Auto-swing for vertical louvers




### SPECIFICATIONS:

Indoor Model			CH-30ELSPHWM-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	30,000
Heating	Rated Capacity	Btu/h	30,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	823.53/794.12/617.65/470.59
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	51.5/47.5/44
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	5/8"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	3/8" / 5/8"
Dehumidification		Pnt/H	7.99
Communication wiring			16AWG*4
Indoor	Dimension (WxDxH)	inch	49.57x11.14x14.25
	Packing (WxDxH)	inch	52.76x17.72x15.16
	Net/Gross Weight	lbs.	37.48/50.49

# OLIVIA

Units: in

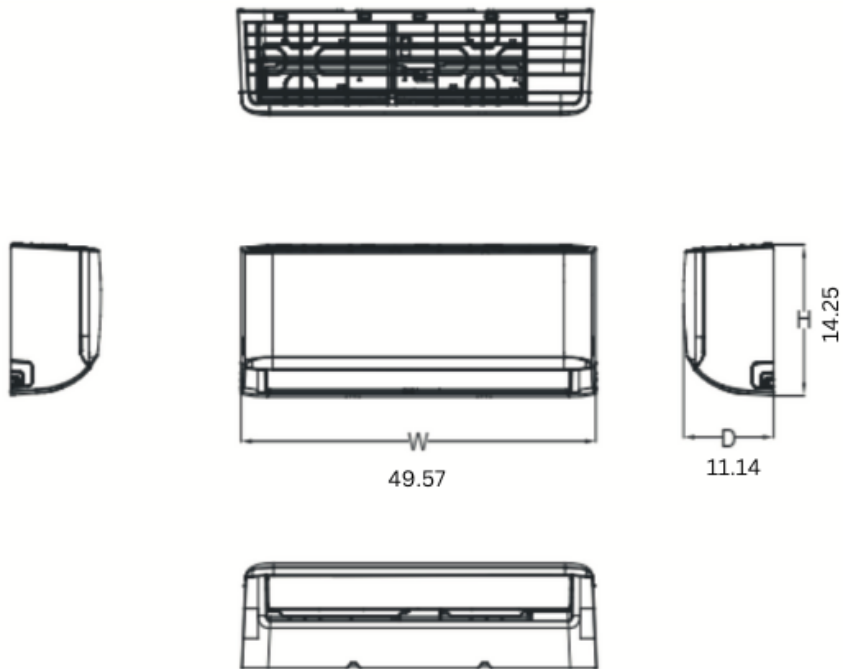

**Dimension (WxDxH)**

**49.57x11.14x14.25**

**Units: in**