

CH-06MASTWM-230VI

Job Name:	Date:	
Location:	Approval:	
Engineer:	Construction:	
Submitted to:	Unit #:	
Submitted by:	Drawing #:	
Reference:		





KEY FEATURES:

- LED display
- Smart Kit included
- Quiet operation
- Multiple fan speeds (LOW/MED/HI/TURBO)
- Easy to remove filter
- Auto-swing for vertical and horizontal louvers
- Can be installed up to 2" from the ceiling










Indoor Model			CH-06MASTWM-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	6,000
Heating	Rated Capacity	Btu/h	7,000
Minimum Circuit Ampacity (MCA)		А	3
Max. Fuse		А	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	364.71/317.65/217.65/167.65
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	36/32/23
External static presure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	5/8"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4" / 3/8"
Dehumidification		Pnt/H	0.32
Communication wiring			16AWG*4
Indoor	Dimension (W×D×H)	inch	33.66x9.09x11.69
	Packing (W×D×H)	inch	36.22x12.20x14.57
	Net/Gross Weight	lbs.	22.71/28.88






Units: in (mm)



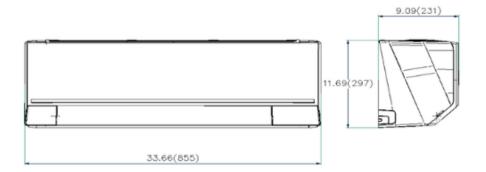



Dimension (WxDxH) 33.66x9.09x11.69