

**Job Name:** \_\_\_\_\_  
**Location:** \_\_\_\_\_  
**Engineer:** \_\_\_\_\_  
**Submitted to:** \_\_\_\_\_  
**Submitted by:** \_\_\_\_\_  
**Reference:** \_\_\_\_\_

**Date:** \_\_\_\_\_  
**Approval:** \_\_\_\_\_  
**Construction:** \_\_\_\_\_  
**Unit #:** \_\_\_\_\_  
**Drawing #:** \_\_\_\_\_



### KEY FEATURES:

- LED display
- Smart Kit included
- Quiet operation
- Multiple fan speeds (LOW/MED/HI/TURBO)
- Easy to remove filter
- Auto-swing for vertical and horizontal louvers
- Can be installed up to 2" from the ceiling




### SPECIFICATIONS:

Indoor Model			CH-18MASTWM-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	18,000
Heating	Rated Capacity	Btu/h	18,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	635.29/523.53/376.47/305.88
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	46/42/24
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	5/8"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4" / 1/2"
Dehumidification		Pnt/H	4.56
Communication wiring			16AWG*4
Indoor	Dimension (WxDxH)	inch	40.28x9.65x12.56
	Packing (WxDxH)	inch	43.11x12.80x15.75
	Net/Gross Weight	lbs.	27.12/35.71



Units: in (mm)

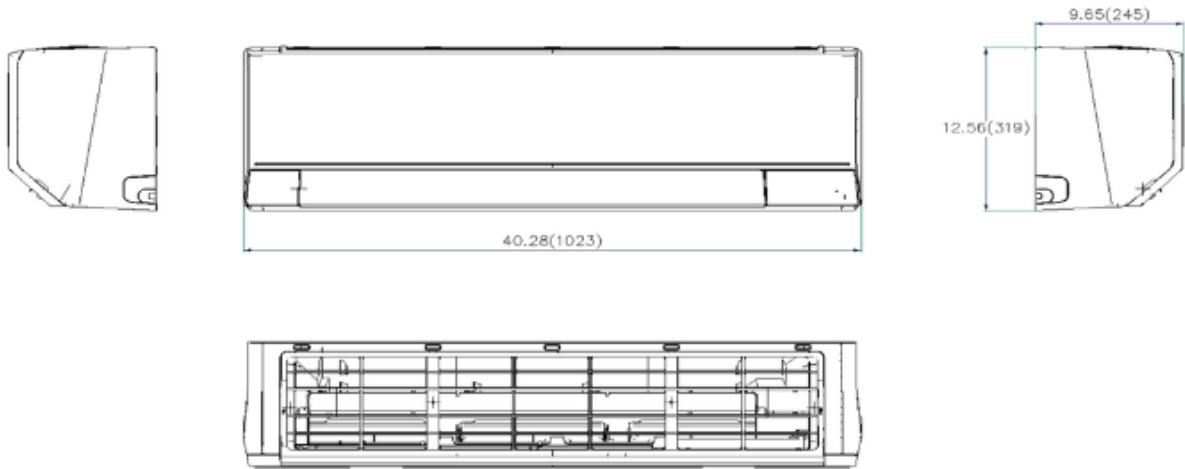

**Dimension (WxDxH)**  
**40.28x9.65x12.56**