

**Job Name:** \_\_\_\_\_  
**Location:** \_\_\_\_\_  
**Engineer:** \_\_\_\_\_  
**Submitted to:** \_\_\_\_\_  
**Submitted by:** \_\_\_\_\_  
**Reference:** \_\_\_\_\_

**Date:** \_\_\_\_\_  
**Approval:** \_\_\_\_\_  
**Construction:** \_\_\_\_\_  
**Unit #:** \_\_\_\_\_  
**Drawing #:** \_\_\_\_\_



### KEY FEATURES:

- LED display
- Smart Kit included
- Quiet operation
- Multiple fan speeds (LOW/MED/HI/TURBO)
- Easy to remove filter
- Auto-swing for vertical and horizontal louvers
- Can be installed up to 2" from the ceiling




### SPECIFICATIONS:

Indoor Model			CH-36ASTWM-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	36,000
Heating	Rated Capacity	Btu/h	36,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	842.94/639.41/505.88/382.35
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	47.5/42/35.5
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	5/8"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	3/8" / 5/8"
Dehumidification		Pnt/H	10.78
Communication wiring			16AWG*4
Indoor	Dimension (WxDxH)	inch	44.88x10.83x14.57
	Packing (WxDxH)	inch	48.43x17.91x13.98
	Net/Gross Weight	lbs.	43.65/54.89

 **ASTORIA**

Units: in

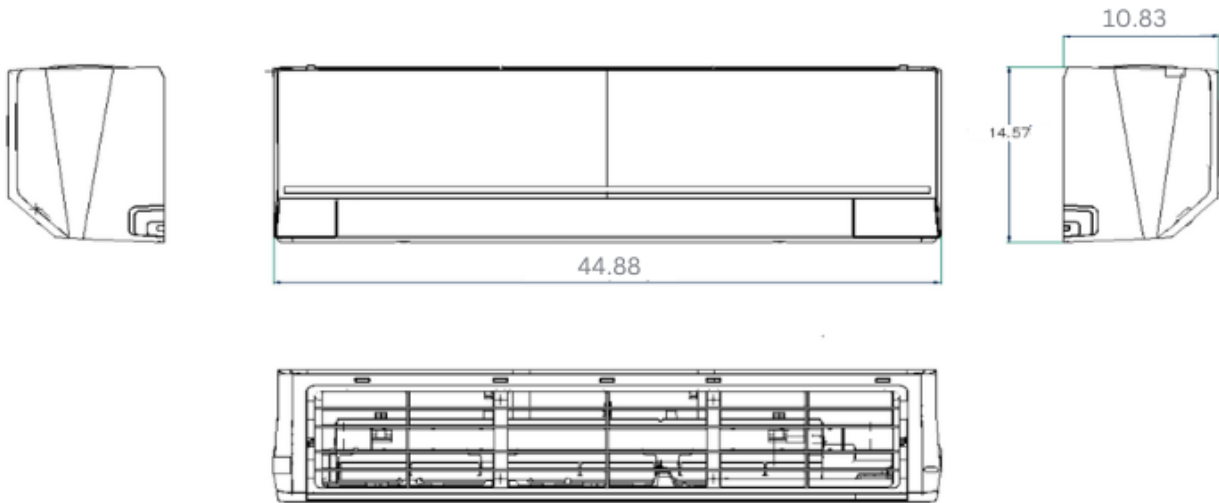

**Dimension (WxDxH)**  
**44.88x10.83x14.57**