

Job Name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____

Date: _____

Approval: _____

Construction: _____

Unit #: _____

Drawing #: _____

KEY FEATURES:

- Can be installed up to 2' from the ceiling
- E-Box and PCB located in the front of the unit with a cover kickstand providing easy access
- Revolutionary design offers convenient disassembly & maintenance with an easy-to-remove blower wheel
- Larger air inlet/outlet for improved air flow
- Auto-Swing for vertical and horizontal louvers
- Easy to remove magnetic filter on top
- Compatible with regular (-13°F) or Hyper (-22°F) outdoor units

NOTES:



 **ASTORIA**




Indoor Model			CH-06MASTWM-230VI
Power supply		V, Ph, Hz	208-230V, 1Ph, 60Hz
Communication wiring			14AWG*4
Cooling	Capacity	Btu/h	6,000(3,400~12,000)
	Input	w	380(166~1,008)
	Rated current	A	3.3(0.72~4.38)
	EER/EER2	Btu/w	15.8
	SEER/SEER2	Btu/w	26.5
Heating at 47 °F	Capacity	Btu/h	7,000(3,300~11,500)
	Input	W	449(241~1,200)
	Rated current	A	3.92(1.05~5.2)
	COP	W/W	3.92
	HSPF4/HSPF2-4		13.6
	HSPF5/HSPF2-5		10
Indoor fan motor		Qty	1
		Input	50
		RLA	0.41
Indoor air flow (Turbo/Hi/Med/Lo) (No duct)		CFM	364.71/317.65/217.65/167.65
ESP (range)		In.wg.	
Indoor noise level (Hi/Med/Lo)		dB(A)	36/32/23
Dehumidification		L/H	0.32
Indoor unit	Dimensions (WxDxH)	inch	33.66x9.09x11.69
	Packing (WxDxH)	inch	36.22x12.20x14.57
	Net/Gross weight	lbs	22.71/28.88
Drainage water pipe diameter		inch	5/8"
Refrigerant piping (Liquid side/Gas side)		inch	1/4"/3/8"
Design pressure		PSIG	550/340
Controller			RG10K-exclusive remote
Room temperature	Cooling	F	60~90
	Heating	F	32~86




Outdoor Model			CH-HPR06F9-230VO
Power supply		V, Ph, Hz	208-230V, 1Ph, 60Hz
Min. circuit ampacity		A	13
Max. fuse		A	15
Compressor	Model		KSK103D33UEZ3
	Type		ROTARY
	Brand		GMCC
	Capacity	Btu/h	11,100
	Input	w	826
	Rated current (RLA)	A	6.4
	Refrigerant oil	oz	VG74 10.5
Outdoor fan motor	Qty		1
	Input	w	92
	RLA	A	0.4
	Speed	r/min	800/600
Outdoor air flow (Max)		CFM	1,294.12
Outdoor noise level (Max)		dB(A)	53.5
Throttle type			EXV
Outdoor unit	Dimensions (WxDxH)	inch	30.12x11.93x21.85
	Packing (WxDxH)	inch	34.92x13.27x24.02
	Net/Gross weight	inch	63.71/69.00
Refrigerant	Type		R410A
	Precharge	ft	25
Additional charge for 1/4 inch liquid pipe		oz	0.16
Additional charge for 3/8 inch liquid pipe		oz	
Refrigerant piping	Liquid side/Gas side	inch	1/4"/3/8"
	Max. pipe length	ft	82.02
	Max. difference in level	ft	32.81
Ambient temperature	Cooling	F	-22~122
	Heating	F	-22~75



Units: in (mm)

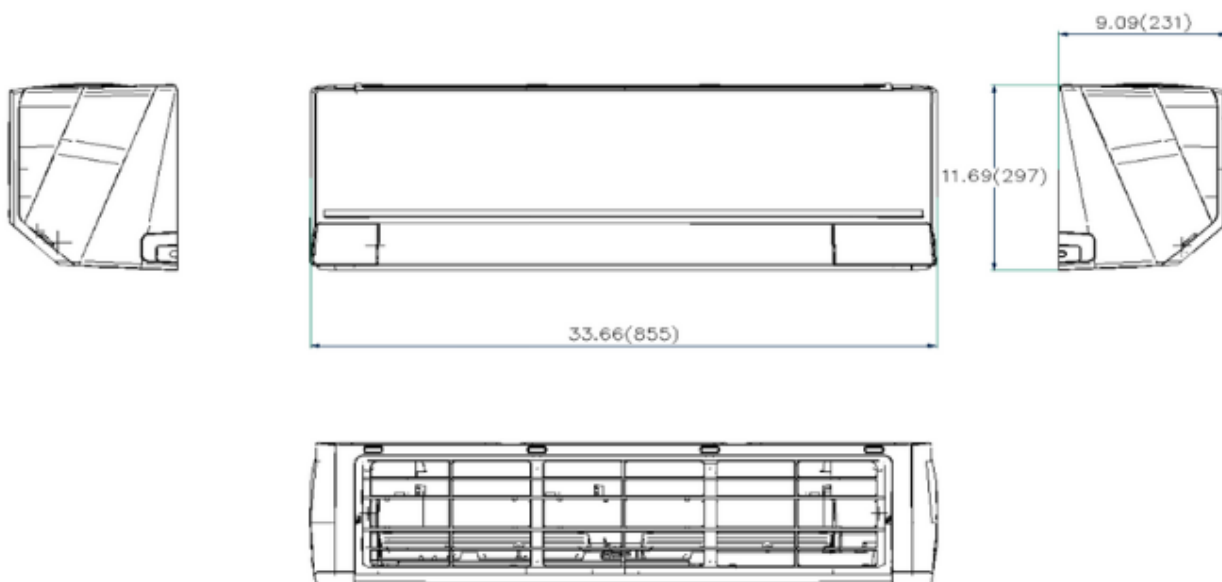

Dimension (WxDxH)
33.66x9.09x11.69

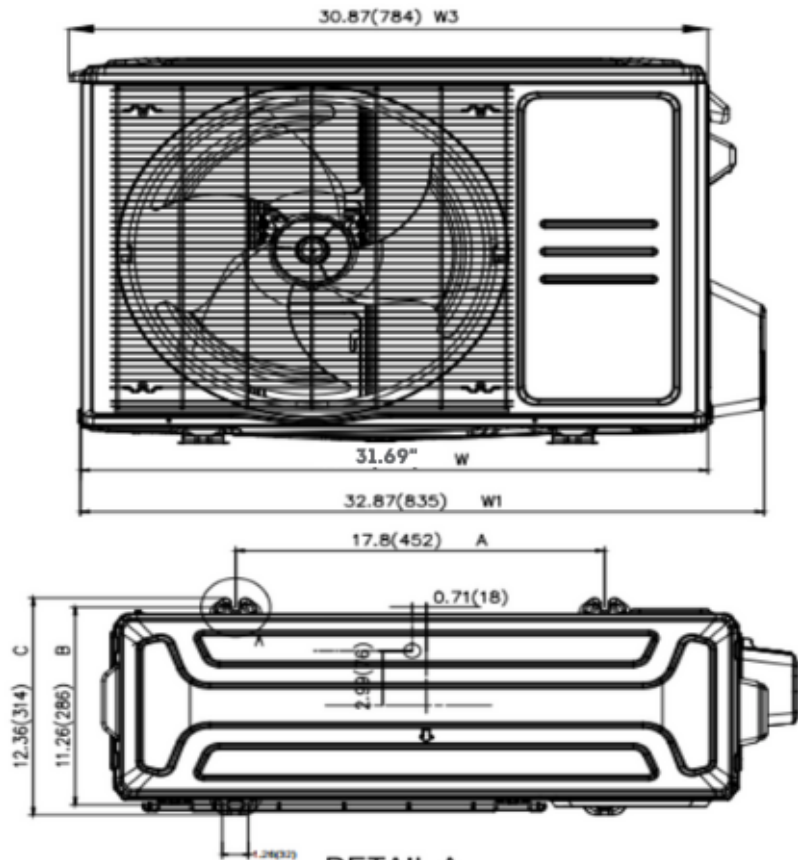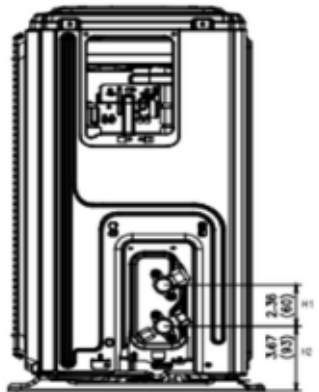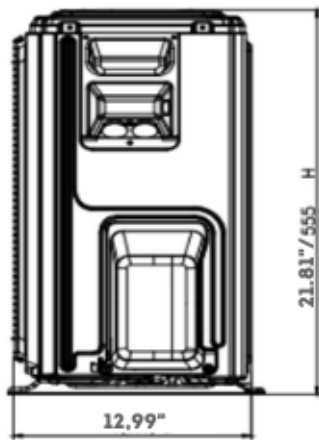

DETAIL A
SCALE 1:2

