

**Job Name:** \_\_\_\_\_  
**Location:** \_\_\_\_\_  
**Engineer:** \_\_\_\_\_  
**Submitted to:** \_\_\_\_\_  
**Submitted by:** \_\_\_\_\_  
**Reference:** \_\_\_\_\_

**Date:** \_\_\_\_\_  
**Approval:** \_\_\_\_\_  
**Construction:** \_\_\_\_\_  
**Unit #:** \_\_\_\_\_  
**Drawing #:** \_\_\_\_\_



### KEY FEATURES:

- LED display
- Smart Kit Ready
- Quiet operation
- Multiple fan speeds (LOW/MED/HI/TURBO)
- Auto-swing for vertical louvers




### SPECIFICATIONS:

Indoor Model			CH-B06MOLVWM-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	6,000
Heating	Rated Capacity	Btu/h	7,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	294.12/247.06/176.47/141.18
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	38.5/33/20.5
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	5/8"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4" / 3/8"
Dehumidification		Pnt/H	0.74
Communication wiring			16AWG*4
Indoor	Dimension (W×D×H)	inch	28.70x7.87x11.50
	Packing (W×D×H)	inch	31.10x10.63x14.76
	Net/Gross Weight	lbs.	17.64/22.49

# OLIVIA

Units: in

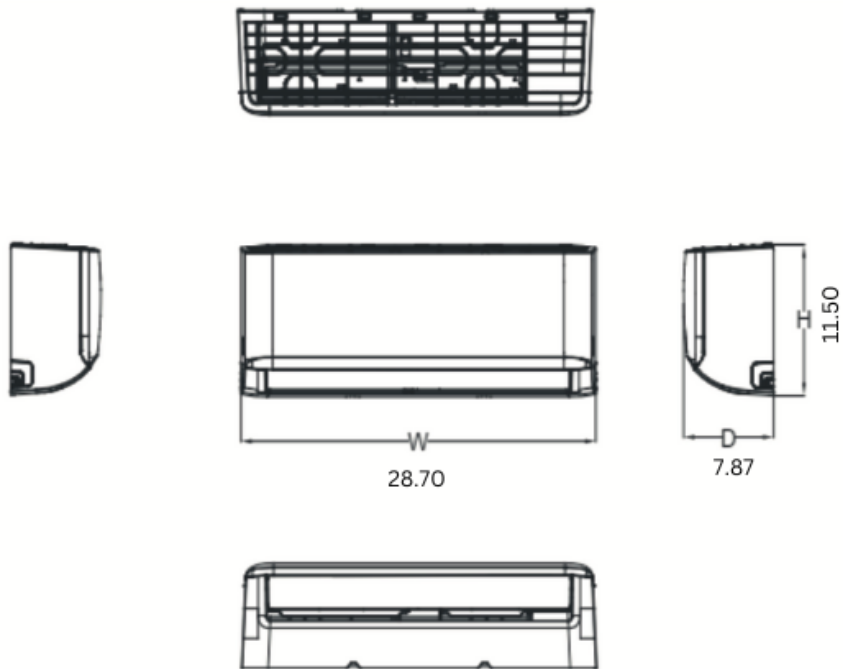

**Dimension (WxDxH)**  
**28.70x7.87x11.50**