

Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Date: _____
Approval: _____
Construction: _____
Unit #: _____
Drawing #: _____



KEY FEATURES:


- Up to 2 Zone
- Inverter Technology
- HIGH-FREQUENCY RACER TECHNOLOGY: Enables the compressor to reach maximum speed within 6 seconds on start up.
- HIGH-EFFICIENCY PIPES: 54 teeth to increase heat exchange.
- INTELLIGENT DUSTING SWITCH: Reverses the fan to clean dust, sand, and other debris from the coil.
- The Cooper&Hunter standard warranty offers seven years on the compressor and five years on parts.

Cooling Capacity	Heating Capacity	SEER2	EER2	COP
Btu/h	Btu/h	19	12	3.62
18,000(3,850~22,400)	19,000(4,350~25,800)			

**Please note: for ducted solutions, values are represented with Outdoor Units combined with Indoor ducted units.
 Values will vary with depending on the combination of Outdoor/Indoor models used.*

SPECIFICATIONS:

Outdoor Model			CH-18MES-230VO
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity (range)	Btu/h	18,000(3,850~22,400)
Heating	Rated Capacity (range)	Btu/h	19,000(4,350~25,800)
	HSPF4		9.8
	HSPF5		7.6
Minimum Circuit Ampacity (MCA)		A	18
Max. Fuse		A	25
Rated current (RLA)		A	6.83(1.33~9.31)
Compressor	Model		KTN150D30UFZA
	Type		Twin-ROTARY
	Brand		GMCC
	RLA	A	10
	Input	w	1,250
	Refrigerant oil	oz	VG74 15.2
Outdoor fan motor	Qty		1
	Input	w	150
	RLA	A	1
Outdoor air flow (Max)		CFM	1,764.71
Outdoor noise level (Max)		dB(A)	58.5
Outdoor unit	Dimensions (WxDxH)	in	35.04x13.46x26.50
	Packing (WxDxH)	in	40.55x17.24x29.53
	Net/Gross weight	in	100.31/108.69
Refrigerant	Type/Quantity	oz	R410A
	Precharge	ft	25x2
	Additional Charge (liquid pipe)	oz	65.26
Design pressure		PSIG	550/340
Refrigerant piping	Liquid side/Gas side	in	2x1/4" 2x3/8"
	Max. length for all indoor units	ft	131.23
	Max. length for one indoor unit	ft	82.02
	Max. height difference between indoor and outdoor	ft	49.21
	Max. height difference between indoor units	ft	33
Ambient temperature	Cooling	F	5~122
	Heating	F	-13~75

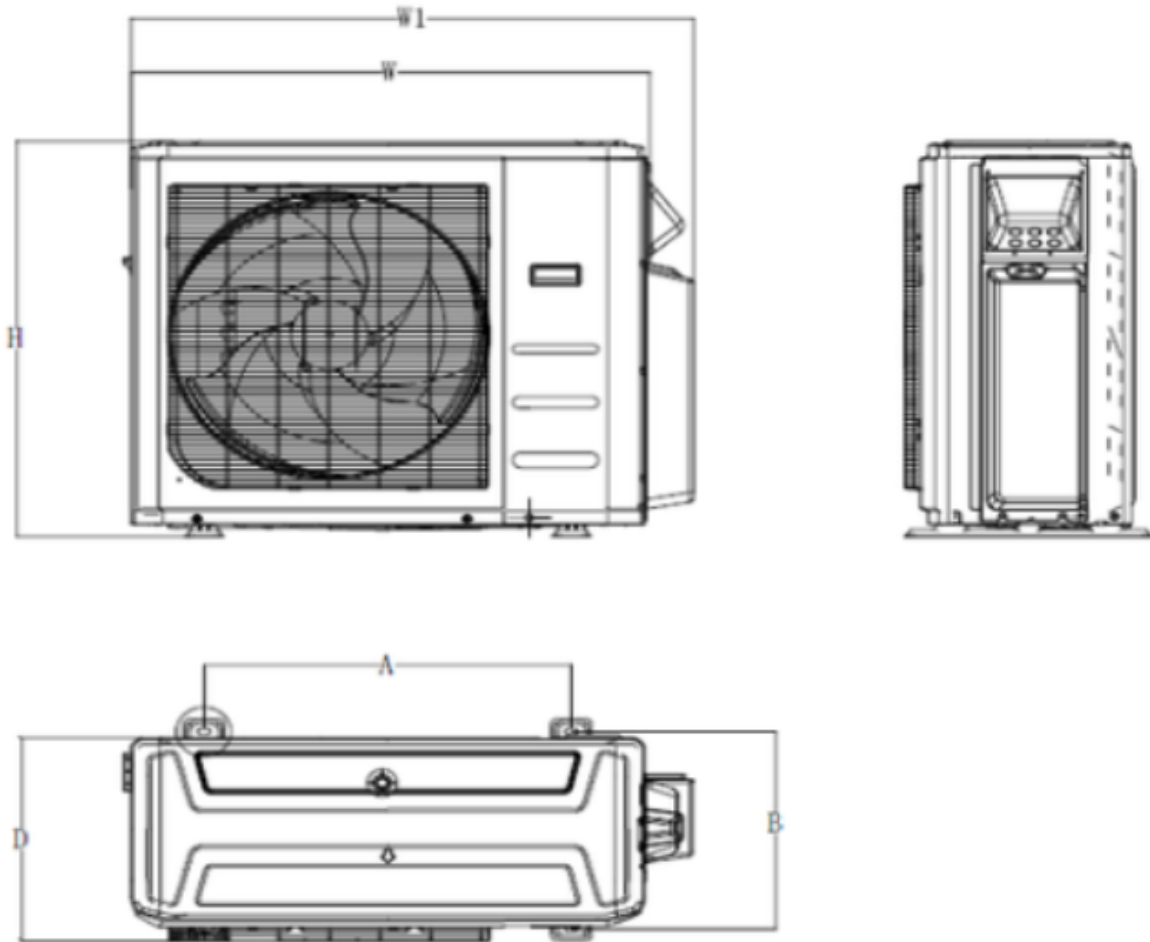

Dimensions	Width	Depth	Height
Inches	37.24	16.14	31.89