

CH-55MES-230VO (Non-ducted)

Job Name:	Date:		
Location:	Approval:		
Engineer:	Construction:		
Submitted to:	Unit #:		
Submitted by:	Drawing #:		
Reference:			



KEY FEATURES:

- Up to 5 Zone
- Inverter Technology
- HIGH-FREQUENCY RACER TECHNOLOGY: Enables the compressor to reach maximum speed within 6 seconds on start up.
- HIGH-EFFICIENCY PIPES: 54 teeth to increase heat exchange.
- INTELLIGENT DUSTING SWITCH: Reverses the fan to clean dust, sand, and other debris from the coil.
- The Cooper&Hunter standard warranty offers seven years on the compressor and five years on parts.

Cooling Capacity	Heating Capacity	SEER2	EER2	СОР
Btu/h	Btu/h	21.3	10.5	3.2
55,000(19,000~57,300)	55,000(12,500~60,000)	21.5		


^{*}Please note: for Ductless solutions, these values are represented with Outdoor Units combined with Indoor Wall Mounted Mini Split units. Values will vary with depending on the combination of Outdoor/Indoor models used.





CH-55MES-230VO (Non-ducted)

Outdoor Model			CH-55MES-230VO	
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz	
Cooling	Rated Capacity (range)	Btu/h	55,000(19,000~57,300)	
	Rated Capacity (range)	Btu/h	55,000(12,500~60,000)	
Heating	HSPF4		9.1	
	HSPF5		6.8	
Minimum Circuit Ampacity (MCA)	А	40		
Max. Fuse	А	60		
Rated current (RLA)	А	23.5(4.3~26.5)		
	Model		KTQ420D1UMU	
	Туре		ROTARY	
•	Brand		GMCC	
Compressor	RLA	А	25	
	Input	w	3,700	
	Refrigerant oil	OZ	VG74 47.3	
	Qty		2	
Outdoor fan motor	Input	w	126	
	RLA	А	2.5	
Outdoor air flow (Max)		CFM	4,500	
Outdoor noise level (Max)		dB(A)	62	
	Dimensions (WxDxH)	in	37.48x16.34x52.48	
Outdoor unit	Packing (WxDxH)	in	43.11x19.49x58.27	
	Net/Gross weight	in	224.21/257.28	
	Type/Quantity	OZ	R410A	
Refrigerant	Precharge	ft	25x5	
	Additional Charge (liquid pipe)	OZ	162.26	
Design pressure		PSIG	550/340	
	Liquid side/Gas side	in	5x1/4" 3x3/8"+2x1/2"	
	Max. length for all indoor units	ft	262.46	
Refrigerant piping	Max. length for one indoor unit	ft	114.83	
	Max. height difference between indoor and outdoor	ft	49.21	
	Max. height difference between indoor units	ft	33	
Ambient temperature	Cooling	F	5~122	
	Heating	F	-13 ~ 75	



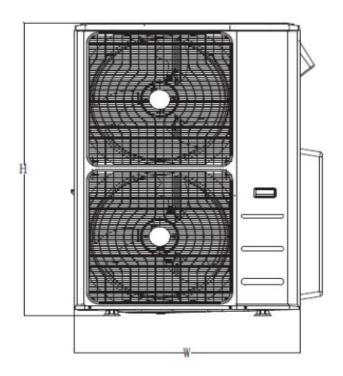





Unit	W	D	Н	W1	Α	В
mm	952	415	1333	1060	634	404
inch	37.5	16.3	52.5	41.7	25.0	15.9