

Job Name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____

Date: _____


Approval: _____

Construction: _____

Unit #: _____

Drawing #: _____

Slim Duct

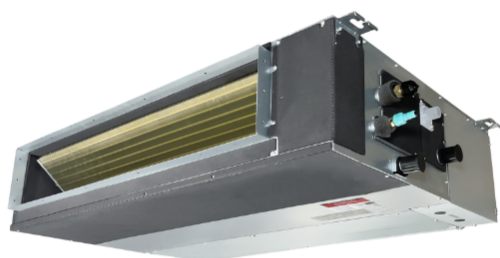

KEY FEATURES:

- Flexible Installation
- Compatible with Regular or Hyper Heat Pump
- SmartPort Ready
- Wall Thermostat Included
- Remote Control Included




SPECIFICATIONS:

Indoor Model			CH-M12DTUI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	12,000
Heating	Rated Capacity	Btu/h	12,500
Minimum Circuit Ampacity (MCA)		A	1.3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	352.94/282.35/176.47
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	38/34.5/31
External static pressure (SlimDuct/AHU only)		in. WG	0.3
Drainage water pipe diameter		inch	1"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4" - 1/2"
Dehumidification		Pnt/H	3.47
Communication wiring			14AWG*4
Indoor	Dimension (W×D×H)	inch	27.56x19.92x7.87
	Packing (W×D×H)	inch	33.86x21.26x11.22
	Net/Gross Weight	lbs.	39.24/48.50

CH-M12DTUI

Unit: inch

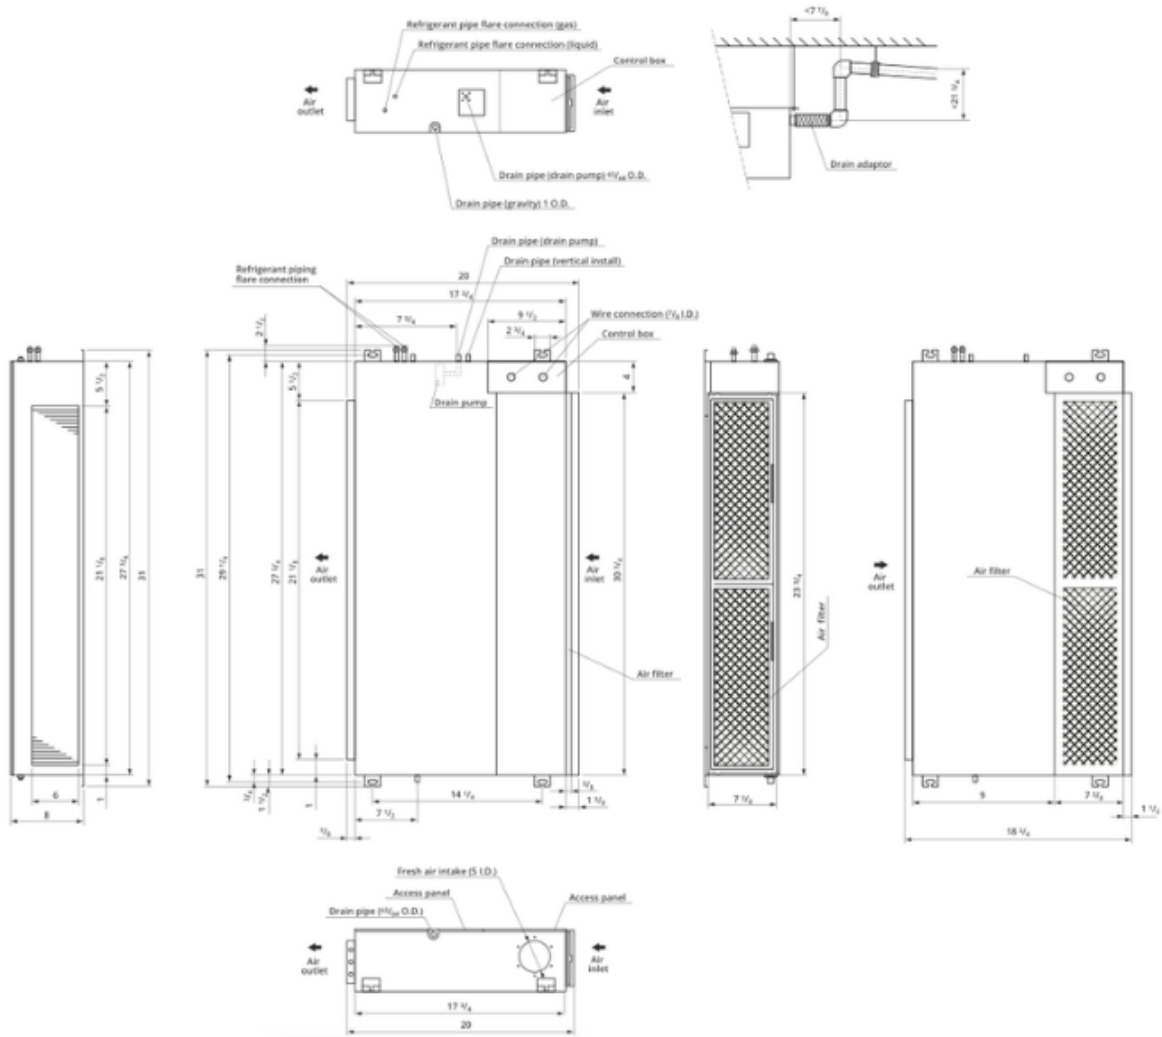

27.56x19.92x7.87