


Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Date: _____
Approval: _____
Construction: _____
Unit #: _____
Drawing #: _____

Slim Duct

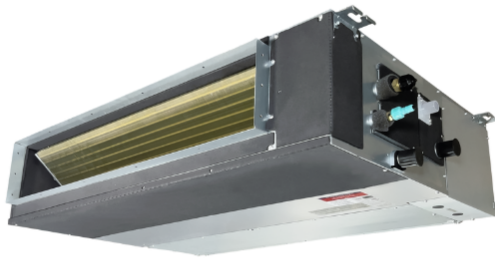

KEY FEATURES:

- Flexible Installation
- Compatible with Regular or Hyper Heat Pump
- SmartPort Ready
- Wall Thermostat Included
- Remote Control Included



SPECIFICATIONS:

Indoor Model			CH-M18DTUI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	17,000
Heating	Rated Capacity	Btu/h	19,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	529.41/450.00/370.59
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	42/38/35.5
External static pressure (SlimDuct/AHU only)		in. WG	0.3
Drainage water pipe diameter		inch	1"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4" - 1/2"
Dehumidification		Pnt/H	3.74
Communication wiring			14AWG*4
Indoor	Dimension (WxDxH)	inch	34.65x26.54x8.27
	Packing (WxDxH)	inch	42.13x28.54x11.02
	Net/Gross Weight	lbs.	55.34/67.02

