

Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Date: _____
Approval: _____
Construction: _____
Unit #: _____
Drawing #: _____


KEY FEATURES:

- Flexible Installation
- Compatible with Regular or Hyper Heat Pump
- SmartPort Ready
- Wall Thermostat Included
- Remote Control Included

NOTES:




Slim Duct

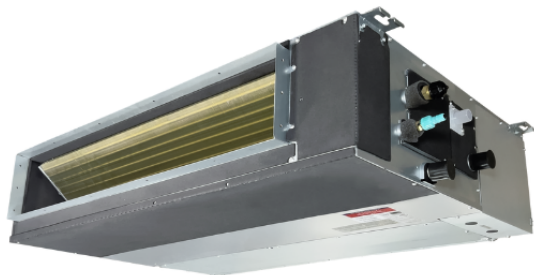




Indoor Model			CH-M12DTUI
Power supply		V, Ph, Hz	208-230V, 1Ph, 60Hz
Communication wiring			14AWG*4
Cooling	Capacity	Btu/h	12,000(2,250~14,400)
	Input	w	1,028(177~1,350)
	Rated current	A	4.22(1.43~6.18)
	EER/EER2	Btu/w	11.7
	SEER/SEER2	Btu/w	19.5
Heating at 47 °F	Capacity	Btu/h	12,500(1,800~16,300)
	Input	W	1,030(177~1,500)
	Rated current	A	4.58(1.46~6.86)
	COP	W/W	3.56
	HSPF4/HSPF2-4		10
	HSPF5/HSPF2-5		8.2
Indoor fan motor	Qty		1
	Input		130
	RLA		1
Indoor air flow (Turbo/Hi/Med/Lo) (No duct)		CFM	352.94/352.94/282.35/176.47
ESP (range)		In.wg.	0-0.32
Indoor noise level (Hi/Med/Lo)		dB(A)	40/31.5/26.5
Dehumidification		L/H	3.47
Indoor unit	Dimensions (WxDxH)	inch	27.56x19.92x7.87
	Packing (WxDxH)	inch	33.86x21.26x11.22
	Net/Gross weight	lbs	39.24/48.50
Drainage water pipe diameter		inch	1"
Refrigerant piping (Liquid side/Gas side)		inch	1/4"/1/2"
Design pressure		PSIG	550/340
Controller			RG10K-exclusive remote&120X or 120N wire controller
Room temperature	Cooling	F	62~90
	Heating	F	32~86

Outdoor Model			CH-HPR12-230VO
Power supply		V, Ph, Hz	208-230V, 1Ph, 60Hz
Min. circuit ampacity		A	15
Max. fuse		A	15
Compressor	Model		KTN110D42UFZ
	Type		ROTARY
	Brand		GMCC
	Capacity	Btu/h	11,820
	Input	w	885
	Rated current (RLA)	A	8.8
	Refrigerant oil	oz	VG74 11.8
Outdoor fan motor	Qty		1
	Input	w	73
	RLA	A	0.36
	Speed	r/min	850/680/450
Outdoor air flow (Max)		CFM	1,323.53
Outdoor noise level (Max)		dB(A)	52
Throttle type			EXV
Outdoor unit	Dimensions (WxDxH)	inch	31.69x12.99x21.81
	Packing (WxDxH)	inch	36.02x14.57x24.21
	Net/Gross weight	inch	73.63/79.37
Refrigerant	Type		R410A
	Precharge	ft	25
Additional charge for 1/4 inch liquid pipe		oz	0.16
Additional charge for 3/8 inch liquid pipe		oz	
Refrigerant piping	Liquid side/Gas side	inch	1/4"/1/2"
	Max. pipe length	ft	82.02
	Max. difference in level	ft	32.81
Ambient temperature	Cooling	F	-22 ~ 122
	Heating	F	-22 ~ 75

CH-M12DTUI

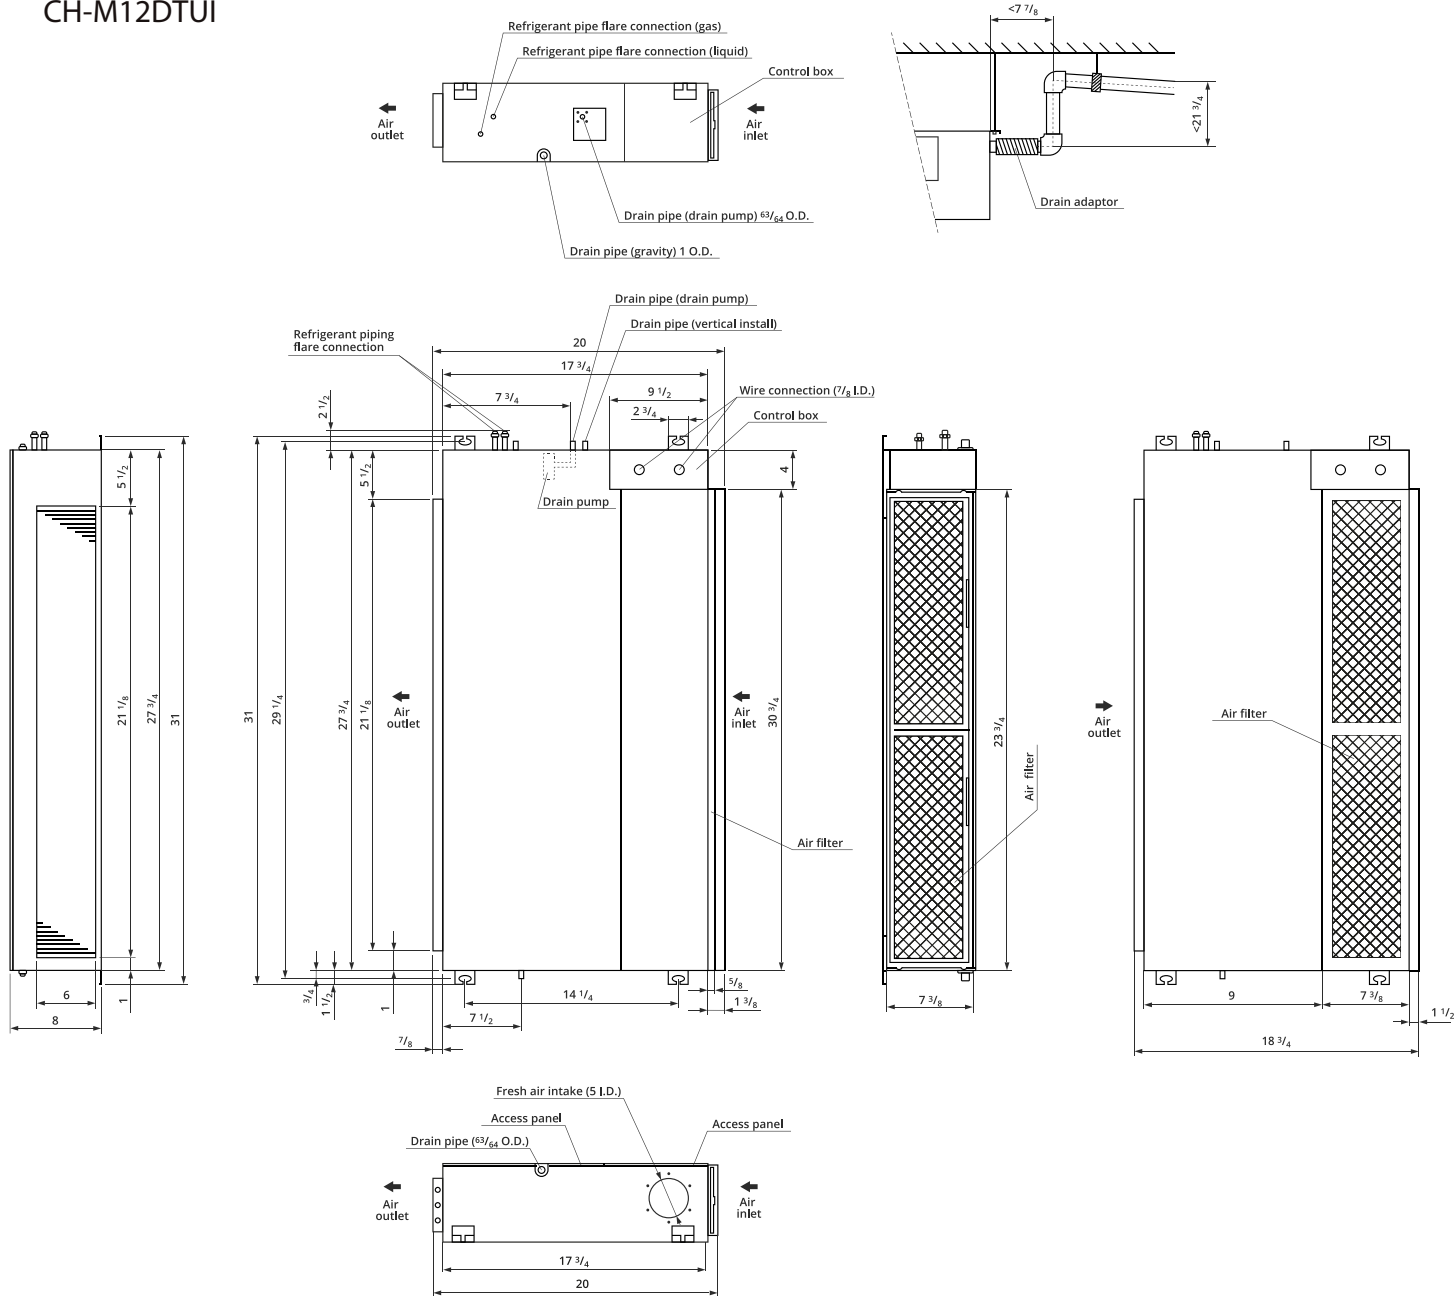

27.56x19.92x7.87

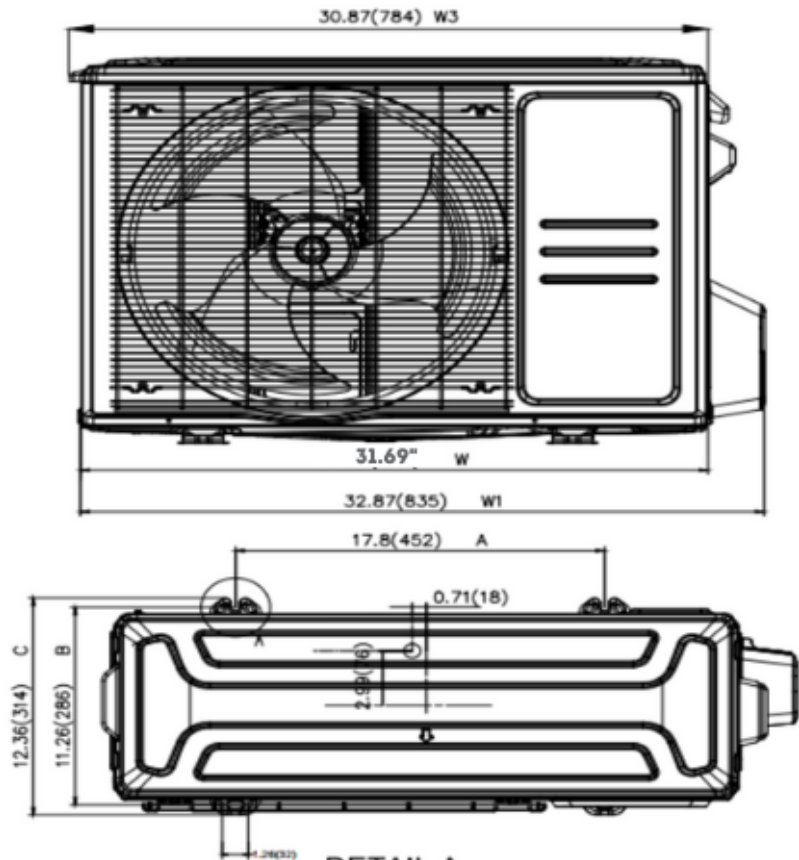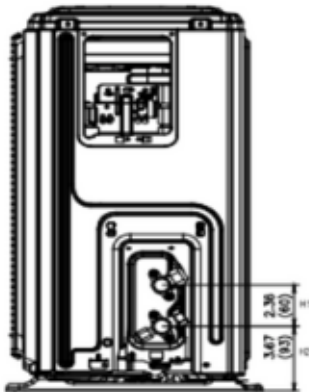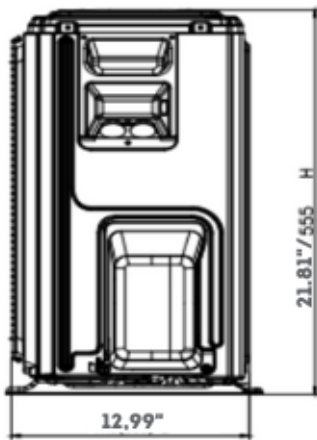

DETAIL A
SCALE 1:2

