

Job Name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____

Date: _____


Approval: _____

Construction: _____

Unit #: _____

Drawing #: _____

Slim Duct

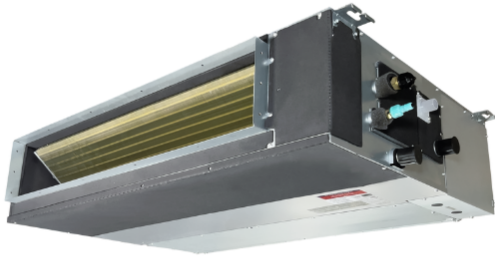

KEY FEATURES:

- Flexible Installation
- Compatible with Regular or Hyper Heat Pump
- SmartPort Ready
- Wall Thermostat Included
- Remote Control Included
- Smart Kit Built-in



SPECIFICATIONS:

Indoor Model			CH-24MDT-W
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	24,000
Heating	Rated Capacity	Btu/h	25,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	775.47/693.06/434.88
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	44/41/37
External static pressure (SlimDuct/AHU only)		in. WG	0.3
Drainage water pipe diameter		inch	1"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	3/8" - 5/8"
Dehumidification		Pnt/H	4.18
Communication wiring			14AWG*4
Indoor	Dimension (WxDxH)	inch	43.31x30.47x9.80
	Packing (WxDxH)	inch	51.38x31.69x12.40
	Net/Gross Weight	lbs.	90.39/105.82

